

Premium wired infrared touchless switch



505 MH

Surface Installation

Material: Plastic

Contact rating: 1A 24VDC

Input voltage: DC 12V-24V


Output Contact: NO/NC

Induction Distance 3 cm

Working temperature(approx.): 0 to 50 °C

Size:86x86 mm

Wiring instructions

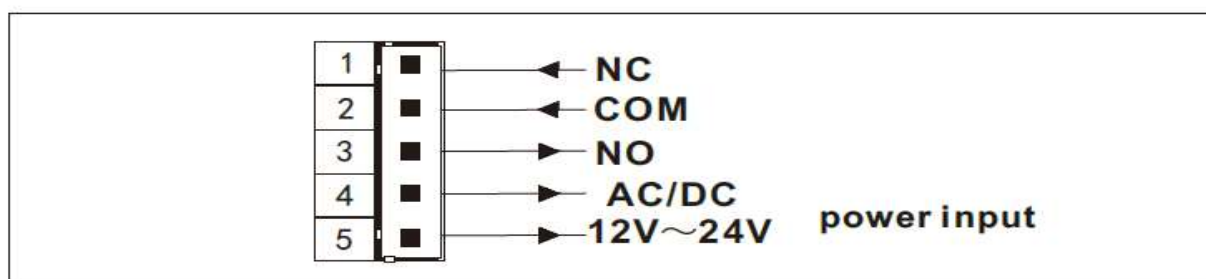

Dimensions(mm)

